



3 Phase Amp Meter CM20

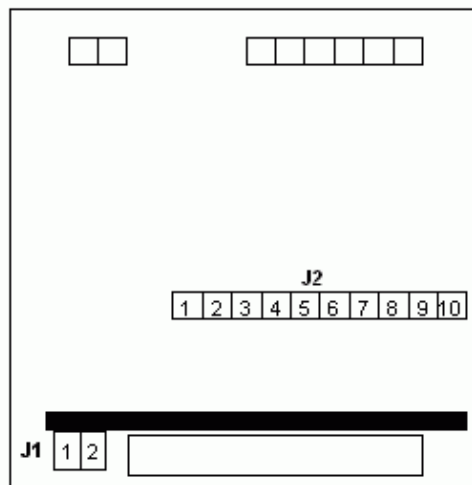

- Display 3 phase current
- 3 1/2 digits LED display
- Selectable CT ratio

3 Phase Amp Meter CM20 เป็น AC Amp Meter แสดงค่ากระแสไฟ 3 phase โดยมีปุ่ม "SEL" ใช้กดเลือกดูกระแสไฟของแต่ละ phase CM20 สามารถตั้งให้ใช้กับ CT ได้หลายขนาด

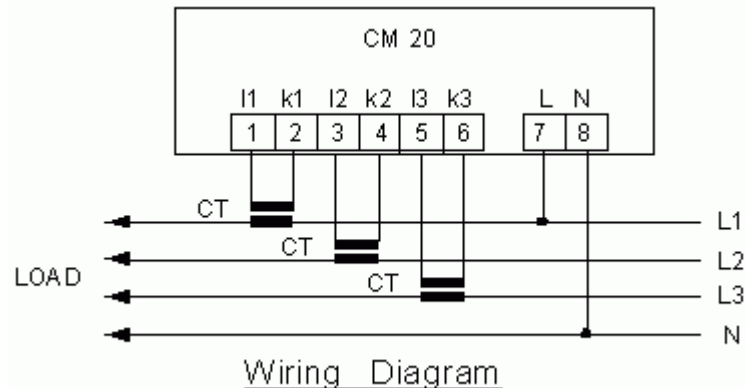

CT	100	120	150	200	250	300	400	500	600	800	1000	1200	1500	2000
J1	1	1	1	1	2	2	2	2	2	2	2	2	2	2
J2	4	3	2	1	10	9	8	7	6	5	4	3	2	1

ตาราง set JUMPER ให้เหมาะกับขนาด CT ที่ใช้

Specifications

Monitor

Display: 3 ½ Digits, 14.3 mm. (7-segment)

Display Color: Red (std)

Input

Number of channel: 1 Channel

Input type: Current (3 phase)

Input range: 0 to 5 Aac, Floating
(Internal CT)

CT Setting: 100 A, 120 A, 150 A, 200 A,
250 A, 300 A, 400 A, 500 A, 600 A,
800 A, 1200 A, 1500 A, 2000 A

Linearity: ± 0.25 % of measuring range

Accuracy: ± 0.25 % + 1 digit of measuring
range

Power Requirements

Power Supply: 110, 220 VAC
(24, 110, 125 VDC Optional)

Environmental Limits

Operating Temperature: 0 to 55 °C

Operating Humidity: 5 to 95% RH

Storage Temperature: 0 to 70 °C

Physical Characteristics

Dimension: W96 x H48 x D120 mm.

Panel Cutout: W90 x H40 mm.

Mounting: Panel flush mounting

Wiring: Screw terminals

Warranty

Warranty Period: 5 year

Ordering Information: Specify CT, Power Supply

Example CM20/500/5A/220VAC

Package Checklist

1. CM20

Panel Cutout

