

Signal Converter SC98



- Programmable DC. voltage or DC. current input
- Two isolated outputs
- Isolated input, output and power supply
- Universal Conversions
- Plug-in socket structure

Signal Converter SC98 accepts any standard and many non-standard input signals and converts to two isolated outputs signals. Low input resistance to current signals and high input resistance to voltage signals mean the signal converter can be inserted into existing system with no loss of performance. To minimize noise and other signal errors, the Signal Converter also features complete galvanic isolation of input, output and power supply.

Specifications

Analog Input

Number of Channel: 1 Channel

Input Type: Current, Voltage

Input Range:

Current (100 μ A DC to 100 mA DC)

Voltage (10 mVDC to 100 VDC)

Input Impedance:

Current (Max 20 Ω)

Voltage (Min 200 K Ω)

Analog Output

Number of Channel: 2 Channels

Output Type: Current, Voltage

Output Range:

Current (0 to 20, 4 to 20 mA)

Voltage (0 to 1, 0 to 5, 1 to 5,

0 to 10 VDC)

Linearity: < \pm 0.2 % of span

Output Load Resistance:

Current (max. 1000 Ω load)

Voltage (min 1000 Ω load)

Isolation Voltage: 500 VAC between input output 1 output 2 and power supply

Power Requirements

Power Supply: 100, 110, 220 VAC
(24, 110, 125 VDC Optional)

Environmental Limits

Operating Temperature: 0 to 55 $^{\circ}$ C

Operating Humidity: 5 to 95% RH

Storage Temperature: 0 to 70 $^{\circ}$ C

Physical Characteristics

Dimension: W50 x H70 x D130 mm.

Mounting: Wall or DIN rail

Connection: Plug-in 11 pins socket

Warranty

Warranty Period: 5 Year


Ordering Information: Specify input, output 1, output 2 and power supply

Example SC98/0-10VDC/4-20mA/4-20mA/220VAC

Package Checklist

1. SC98

Dimension (Unit: mm.)

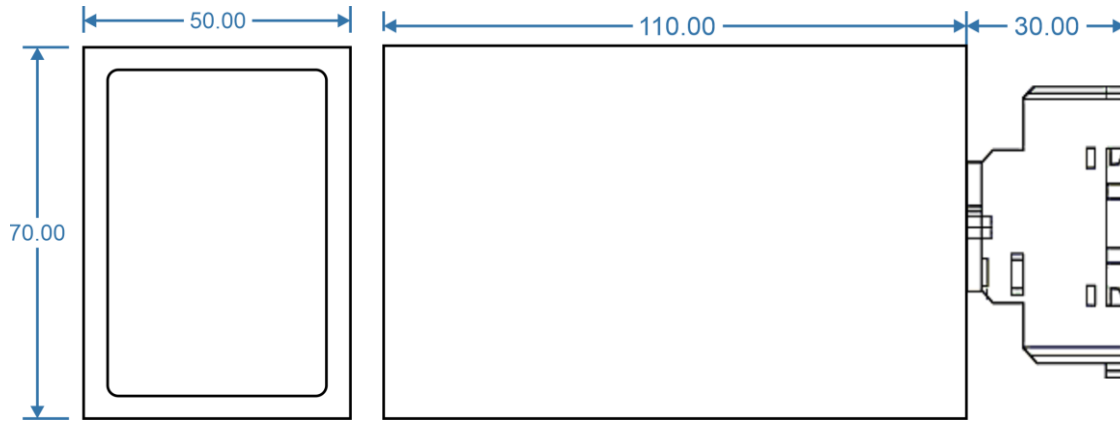

Wiring

