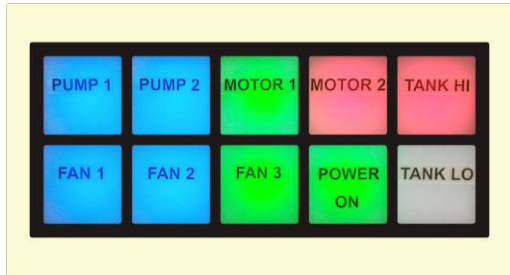


Pilot Lamp

PL2000




- 10 LED Lamps
- 3 Color Selectable
(Red, Blue, Green)
- Programmable Flashing

Pilot Lamp PL2000 It features 10 LED lamps capable of displaying three selectable colors; examples of applications include indicating machine operating status or alarm conditions.



AL1000




PL2000

Displays the alarm status received from the Alarm Annunciator AL1000.



PLC



PL2000

The PLC sends a digital output signal for control.

Specifications

Lamp

Number of Lamp: 10 LED Lamps

Color: Red, Blue, Green

Flashing: Programmable

Digital Input

Sensor Type: Wet Contact or Dry Contact

Wet Contact (DI to COM):

ON: 12 to 24 VDC

OFF: 0 VDC

Dry Contact (DI to GND):

ON: Short to GND

OFF: Open

Isolation: Opto Isolated

Power Requirements

Power Supply: 12 to 35 VDC
or 85 to 230 VAC,
90 to 310 VDC (Optional)

Ordering Information:

Example PL2000

Package Checklist

1. PL2000

Power Consumption

Standby: 30 mA @ 24 VDC

Operate: 100 mA @ 24 VDC

Environmental Limits

Operating Temperature: 0 to 55 °C

Operating Humidity: 5 to 95% RH

Storage Temperature: 0 to 70 °C

Physical Characteristics

Dimension: W205 x H110 x D55 mm.

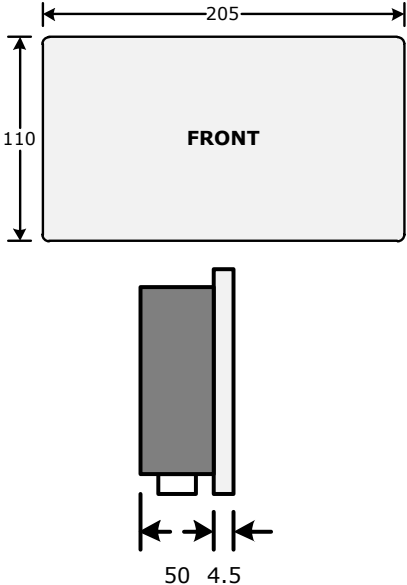
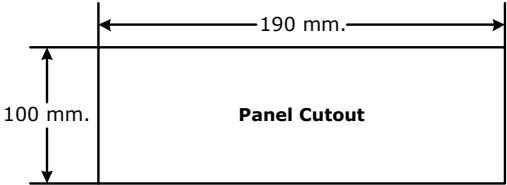

Mounting: Panel Flush Mounting

Warranty

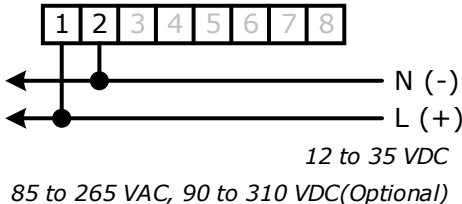



Warranty Period: 5 Year

note: Customers can print text on the dial according to their own desired design.

(Text in the image: Angsana New, Size: 24 px)

Dimensions (Unit: mm.) 	Panel Cutout  Installation 
--	--

Wiring

Supply 																
DIP Switch (Program Flashing)  1 - 2 = Red 3 - 4 = Green 5 - 6 = Blue	<table><thead><tr><th>DIP 1</th><th>DIP 2</th><th>Flashing</th></tr></thead><tbody><tr><td>OFF</td><td>OFF</td><td>Steady</td></tr><tr><td>OFF</td><td>ON</td><td>500/500</td></tr><tr><td>ON</td><td>OFF</td><td>1000/1000</td></tr><tr><td>ON</td><td>ON</td><td>1000/500</td></tr></tbody></table> *** Note Flashing (mSec.) 500/500: ON/OFF	DIP 1	DIP 2	Flashing	OFF	OFF	Steady	OFF	ON	500/500	ON	OFF	1000/1000	ON	ON	1000/500
DIP 1	DIP 2	Flashing														
OFF	OFF	Steady														
OFF	ON	500/500														
ON	OFF	1000/1000														
ON	ON	1000/500														
DI: Dry Contact 	DI: Wet Contact (PNP Output) 															
DI: NPN Open Collector 	DI: Wet Contact or D.C. Pulse 