


Pilot Lamp (MODBUS TCP/IP)


PL2200

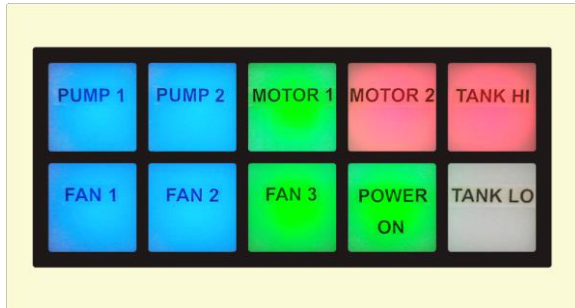

- 10 LED Lamps
- 7 Color Selectable
- Programmable Flashing
- Interface RJ45
- Support MODBUS TCP/IP

Pilot Lamp (MODBUS TCP/IP) PL2200 It features 10 LED lamps capable of displaying three selectable colors, controlled via commands from MODBUS TCP/IP devices such as PLCs or computers.

An example of its application is displaying system alarm conditions received from a PLC via an RJ45 connection.

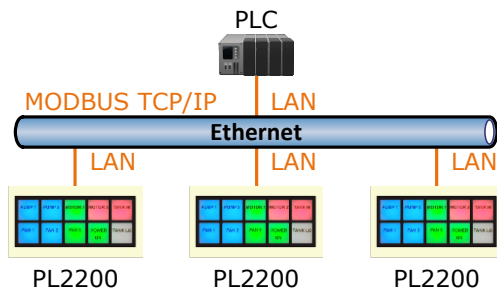

Display the notification status received from the PLC via RJ45.

Specifications

Ethernet Interface

Speed: 10/100 Mbps, Full-duplex or Half-duplex, Auto MDI/MDIX

Connector: RJ45

Standard: 10 Base-T/100 Base-T Standard

Transmission: 100 m.

Protocol: MODBUS TCP/IP

Lamp

Number of Lamp: 10 LED Lamps

Color: Green, Red, Yellow, Blue, Cyan, Magenta, White

Flashing: Programmable

Power Requirements

Power Supply: 24 VDC

Ordering Information:

Example PL2200

Package Checklist

1. PL2200

Power Consumption

Standby: 30 mA @ 24 VDC

Operate: 100 mA @ 24 VDC

Environmental Limits

Operating Temperature: 0 to 55 °C

Operating Humidity: 5 to 95% RH

Storage Temperature: 0 to 70 °C

Physical Characteristics

Dimension: W205 x H110 x D55 mm.

Mounting: Panel Flush Mounting

Warranty

Warranty Period: 5 Year

note: Customers can print text on the dial according to their own desired design.

(Text in the image: Angsana New, Size: 24 px)