




Remote Switch

RS2000



- 8 Touch Buttons
- 8 Digital Output
- 8 LED Lamp
- 7 Color Selectable
- Programmable Flashing

Remote Switch RS2000 This device controls switches to remotely turn electrical equipment on or off via a 2-wire RS485 connection. It features eight LEDs to indicate output status-with seven selectable colors-and eight push-buttons to control remote digital outputs; it is designed to operate exclusively with the DIO2100 Digital Input/Output Module. Typical applications include displaying machinery operating status or alarm conditions. Additionally, when paired with the RC36 device, it can function as a wireless switch.

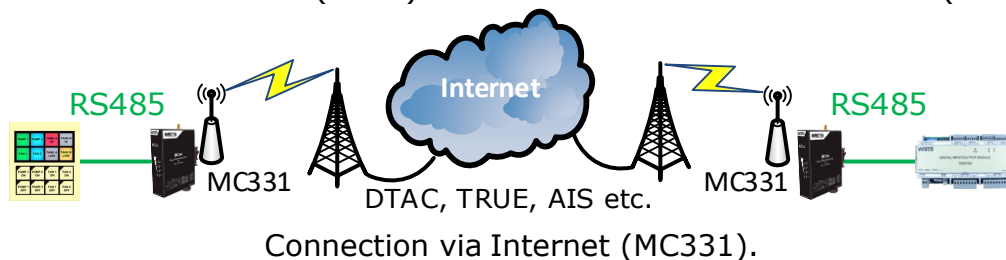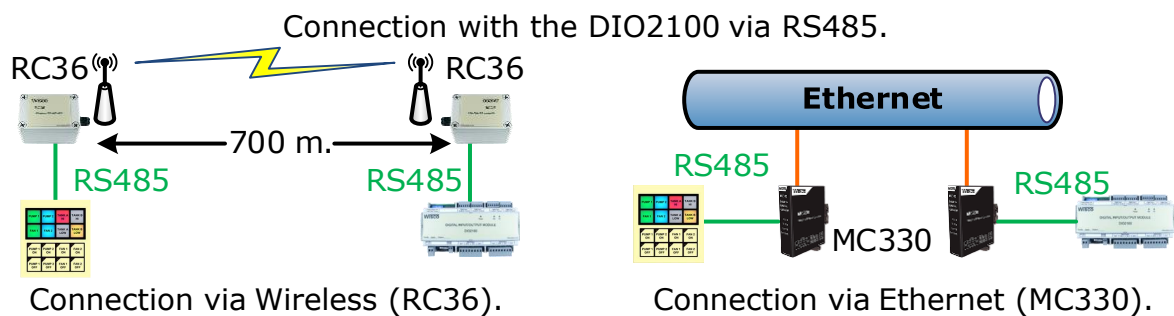

Specifications

Touch

Touch Button: 8 Buttons

Lamp

Number of Lamp: 8 LED Lamps

Color: Green, Red, Yellow, Blue, Cyan, Magenta, White

Flashing: Programmable

Relay Output

Number of Channel: 8 Channels

Relay Type: N.O.

Contact Rating:

5 A @ 250 VAC


5 A @ 30 VDC

Ordering Information:

Example RS2000

Package Checklist

1. RS2000

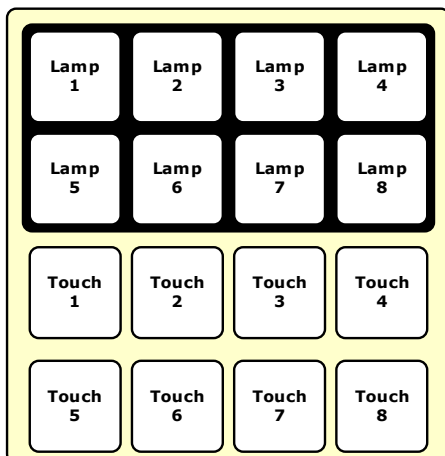

Power Requirements

Power Supply: 24 VDC

Power Consumption

Standby: 30 mA @ 24 VDC

Operate: 550 mA @ 24 VDC

Environmental Limits

Operating Temperature: 0 to 55 °C

Operating Humidity: 5 to 95% RH

Storage Temperature: 0 to 70 °C

Physical Characteristics

Dimension: W174 x H194 x D66 mm.

Mounting: Panel Flush Mounting

Warranty

Warranty Period: 5 Year

note: Customers can print text on the dial according to their own desired design.
(Text in the image: Angsana New, Size: 24 px)